


TECHNICAL CHARACTERISTICS



CODE		AP6	AP10	AP12
Capacity		kg 6	kg 10	kg 12
Diameter Ø	mm	240	240	240
Height H	mm	290	400	400
Material		Steel	Steel	Steel
Weight	kg	8,4	12,4	14,4
Extinguishing agent		Powder*	Powder*	Powder*
Working pressure	bar	15	15	15
test pressure	bar	24	24	24
Bursting pressure	bar	65	65	65
Discharge time	sec	8	13	16

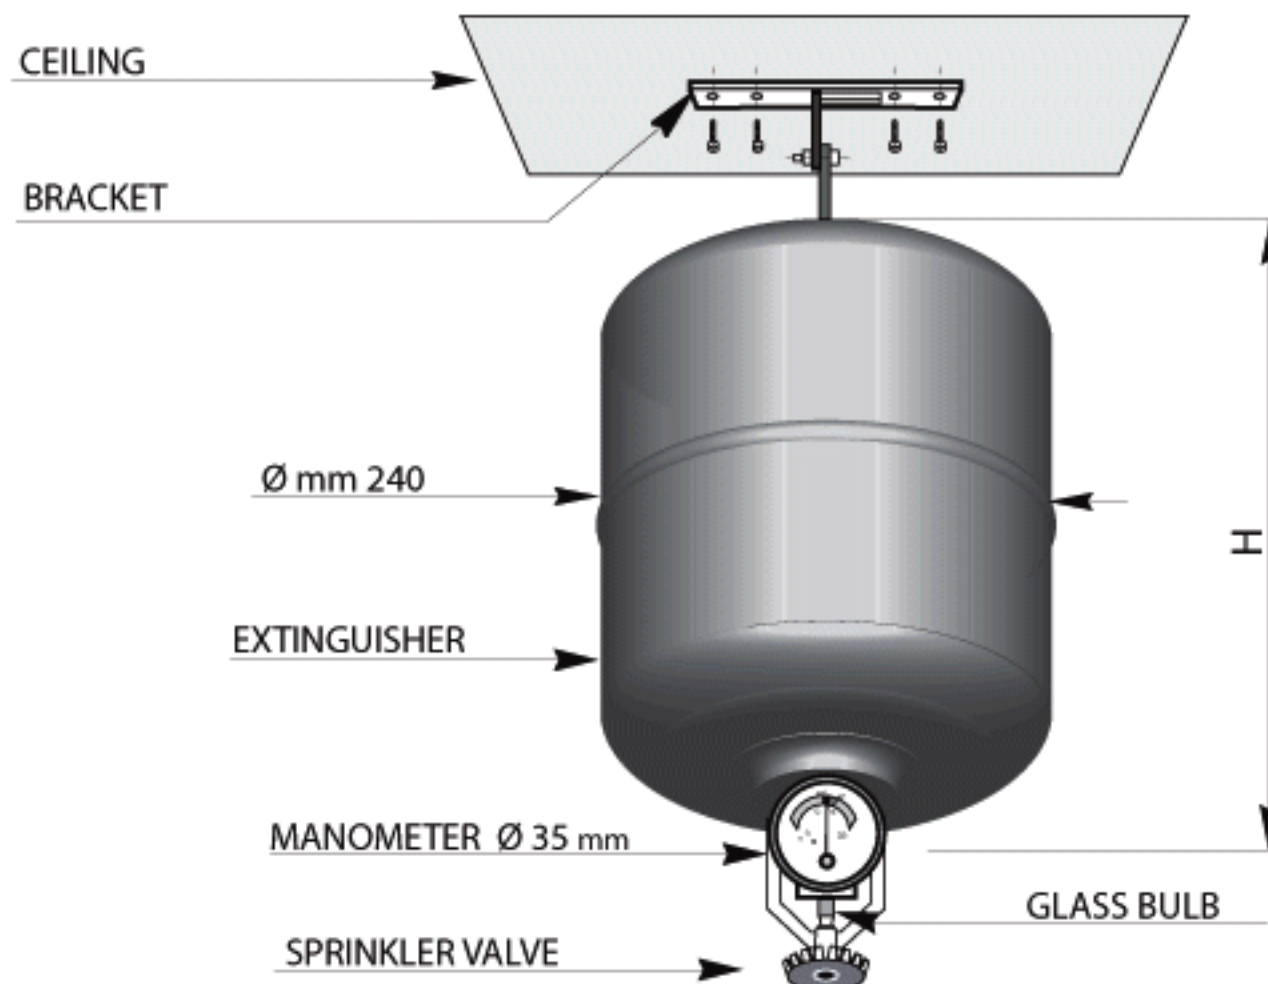

AVAILABLE TEMPERATURE
BULB COLOUR
Orange 57°C
Red 68°C
Yellow 79°C
Green 93°C
Blue 141°C



Fire class A for fires involving wood, paper, straw, and many other combustible solids containing carbonaceous material



Fire class C for fires involving flammable gases



Fire class B for fires involving petrols, oils, fats, solvents, paints, and other flammable liquids.



Can be used on equipment under live electricity.

* We always use Dry Powder ABC 40 (40% monoammonium phosphate) made according to EN 615

M.B. SRL

20025 LEGNANO (MI) - Via Don Milani, 16/18
Tel. 0331 46.52.84 - Fax. 0331 46.52.58
E-mail: info@mb-extinguisher.com
Internet: www.mb-extinguisher.com



ASSOCIATA
ANIMA



UNIONE COSTRUTTORI
MATERIALI ANTINCENDIO



ASSOCIATA AIAS
ASSOCIAZIONE ITALIANA FRA ADDETTI
ALLA SICUREZZA

ASSOCIATA UNI
ENTE NAZIONALE ITALIANO
DI UNIFICAZIONE