
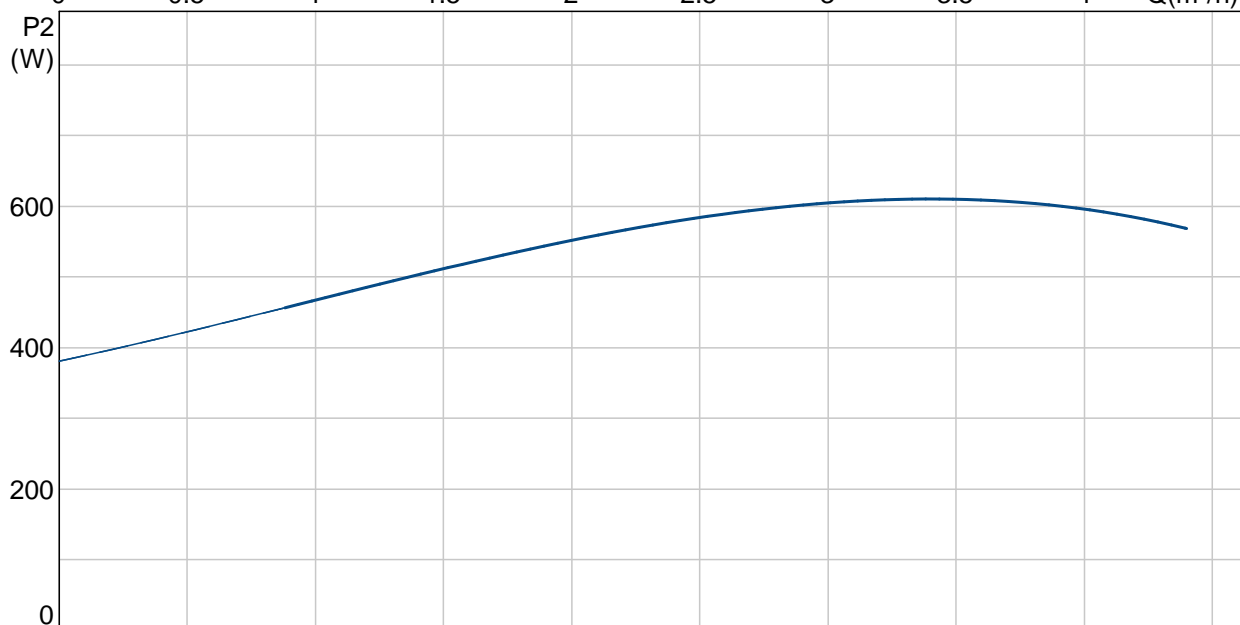
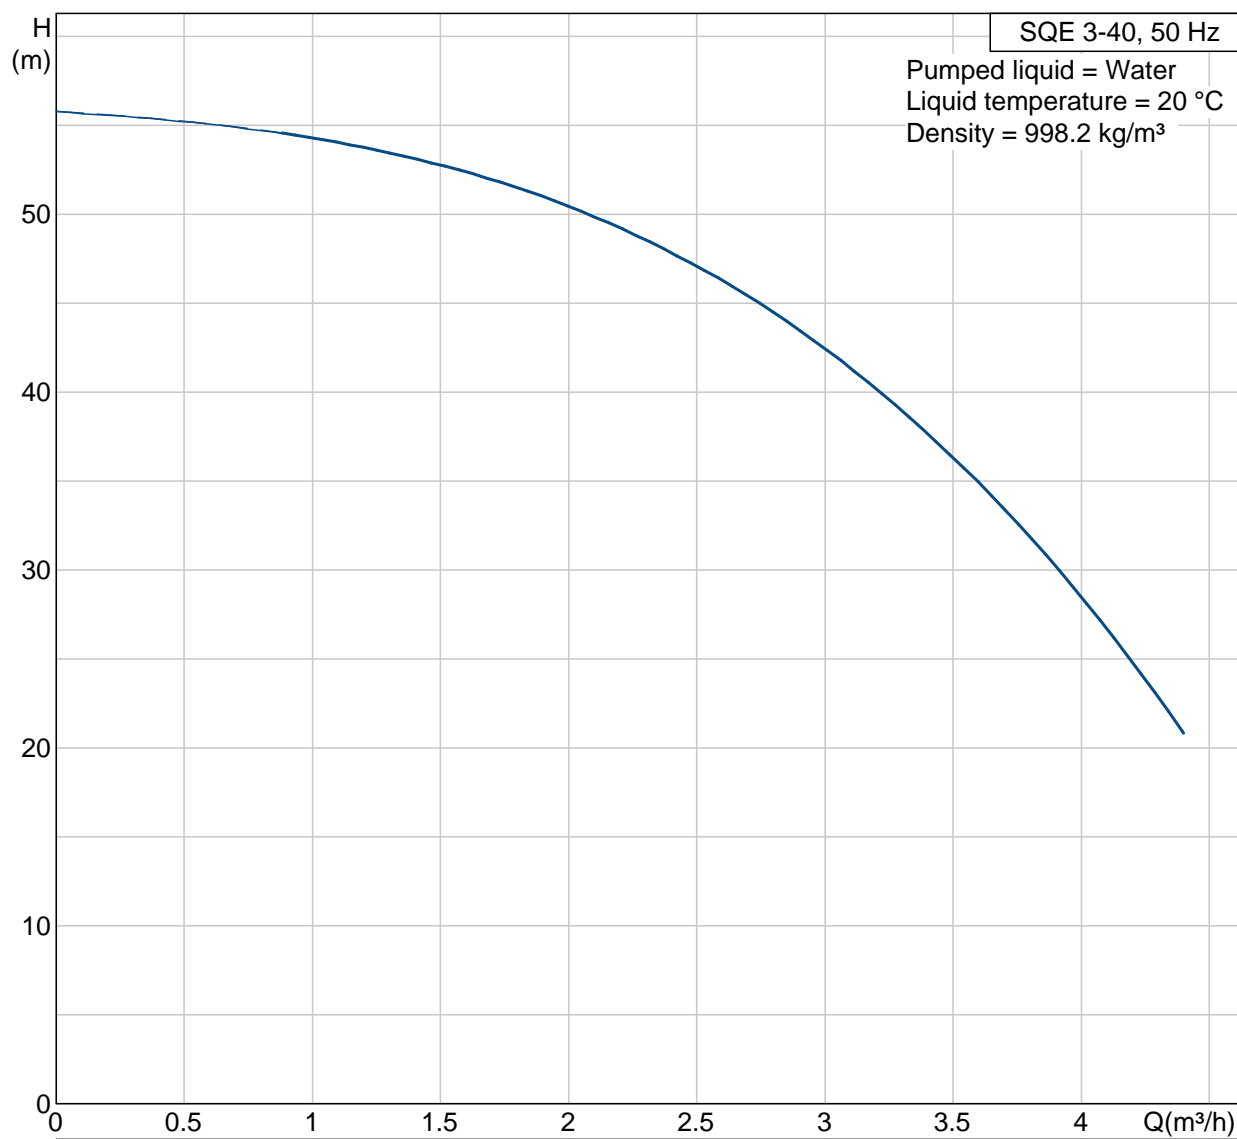



Position	Qty.	Description	Single Price
	1	<p>SQE 3-40</p>  <p>Note! Product picture may differ from actual product</p> <p>Product No.: 96510157 3" multi-stage, submersible pump designed for domestic water supply, liquid transfer in tanks, irrigation and environmental applications. The pump has "floating" impellers, each with its own tungsten carbide/ceramic bearing.</p> <p>The pump features soft starting and protection against dry-running, upthrust, overvoltage, undervoltage, overload and overtemperature.</p> <p>The motor is a single-phase motor of the permanent magnet rotor type ensuring optimum efficiency within a wide load range. The motor is fitted with a replaceable end cover with socket.</p> <p>Liquid: Maximum liquid temperature: 35 °C Max liquid t at 0.15 m/sec: 35 °C Liquid temp: 20 °C Density: 998.2 kg/m³</p> <p>Technical: Speed for pump data: 10700 rpm Actual calculated flow: 3 m³/h Resulting head of the pump: 42.5 m Approvals on motor nameplate: CE,UL,CUL Curve tolerance: ISO9906</p> <p>Materials: Pump: Polyamide / Stainless steel DIN W.-Nr. 1.4301 AISI 304 Impeller: Polyamide Motor: Stainless steel DIN W.-Nr. 1.4301 AISI 304</p> <p>Installation: Pump outlet: Rp 1 1/4 Minimum borehole diameter: 76 mm</p> <p>Electrical data: Motor type: MSE3 Power input - P1: 1.02 kW Rated power - P2: 0.7 kW Mains frequency: 50 Hz Rated voltage: 1 x 200-240 V Start. method: direct-on-line</p>	Price on request

Position	Qty.	Description	Single Price
		<p>Rated current: 5.2 A</p> <p>Power factor: 1,00</p> <p>Rated speed: 10700 rpm</p> <p>Enclosure class (IEC 34-5): 68</p> <p>Insulation class (IEC 85): F</p> <p>Length of cable: 1.5 m</p> <p>Others:</p> <p>Net weight: 4.8 kg</p> <p>Gross weight: 5.5 kg</p> <p>Shipping volume: 0.009 m3</p>	

96510157 SQE 3-40 50 Hz



96510157 SQE 3-40 50 Hz

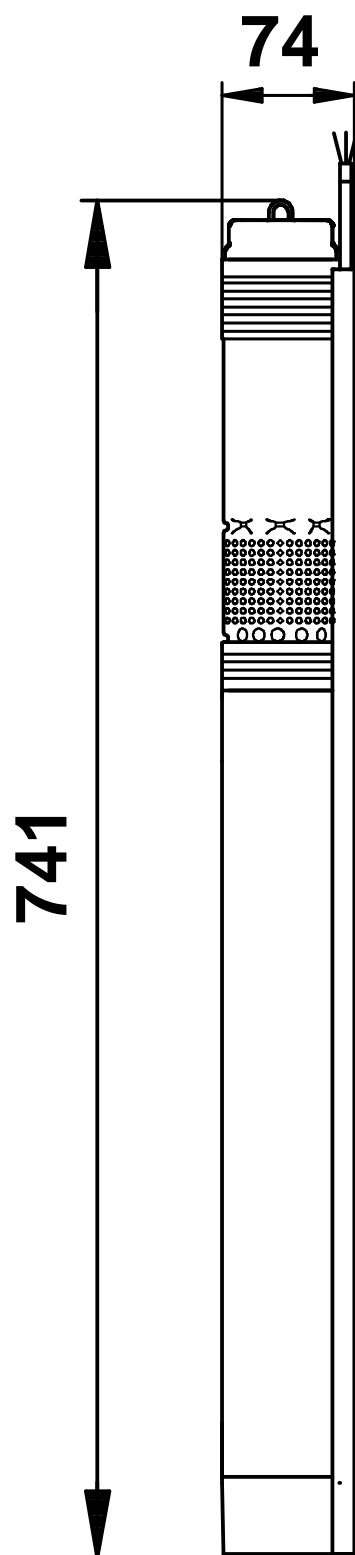

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.